查询CY62146CV30供应商

CY62146CV30 MoBL™

256K x 16 Static RAM

Features

- **High speed:**
  - **55 ns and 70 ns availability**
- **Voltage range:**
  - **CY62146CV30: 2.7V – 3.3V**
- **Pin compatible with CY62146V**
- **Ultra-low active power**
  - **Typical active current: 1.5 mA @ f = 1 MHz**
  - **Typical active current: 7 mA @ f = f_{max} (70 ns speed)**
- **Low standby power**
- **Easy memory expansion with $\overline{CE}$ and $\overline{OE}$ features**
- **Automatic power-down when deselected**
- **CMOS for optimum speed/power**

Functional Description

The CY62146CV30 is a high-performance CMOS static RAM organized as 256K words by 16 bits. This device features advanced circuit design to provide ultra-low active current. This is ideal for providing More Battery Life™ (MoBL™) in portable applications such as cellular telephones. The device also has an automatic power-down feature that significantly reduces power consumption by 80% when addresses are not toggling. The device can also be put into standby mode reducing power consumption by 99% when deselected ($\overline{CE}$ HIGH). The input/output pins (I/O_0 – I/O_{15}) are placed in a high-impedance state when: deselected ($\overline{CE}$ HIGH), outputs are disabled ($\overline{OE}$ HIGH), both Byte High Enable and Byte Low Enable are disabled ($\overline{BHE}$, $\overline{BLE}$ HIGH), or during a Write operation ($\overline{CE}$ LOW and $\overline{WE}$ LOW).

Writing to the device is accomplished by taking Chip Enable ($\overline{CE}$) and Write Enable ($\overline{WE}$) inputs LOW. If Byte Low Enable ($\overline{BLE}$) is LOW, then data from I/O pins (I/O_0 – I/O_7), is written into the location specified on the address pins (A_0 – A_{17}). If Byte High Enable ($\overline{BHE}$) is LOW, then data from I/O pins (I/O_8 – I/O_{15}) is written into the location specified on the address pins (A_0 – A_{17}).

Reading from the device is accomplished by taking Chip Enable ($\overline{CE}$) and Output Enable ($\overline{OE}$) LOW while forcing the Write Enable ($\overline{WE}$) HIGH. If Byte Low Enable ($\overline{BLE}$) is LOW, then data from the memory location specified by the address pins will appear on I/O_0 – I/O_7. If Byte High Enable ($\overline{BHE}$) is LOW, then data from memory will appear on I/O_8 to I/O_{15}. See the Truth Table on page 9 for a complete description of Read and Write modes.

The CY62146CV30 is available in 48-ball FBGA packaging.

Logic Block Diagram

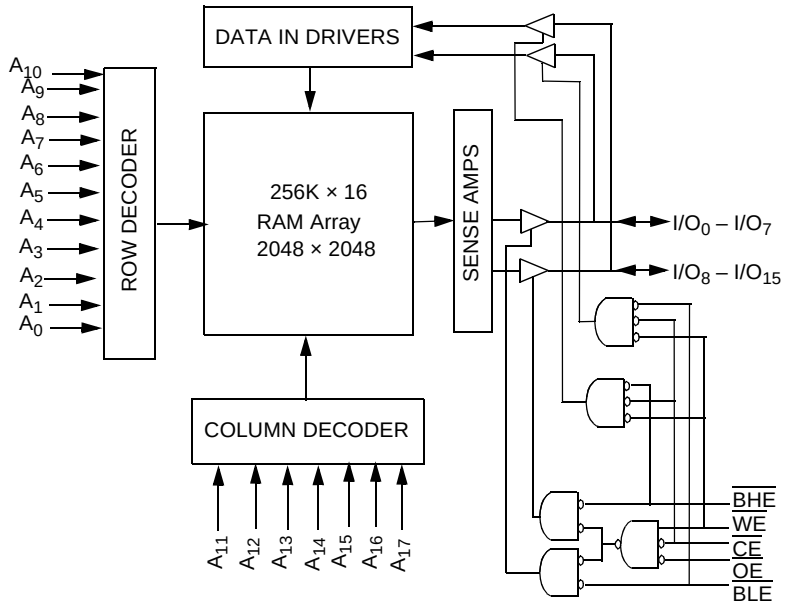

Pin Configuration[1,2]

FBGA (Top View)

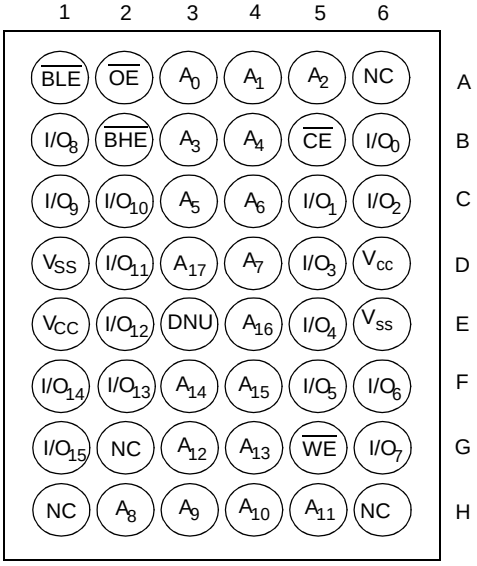
1 2 3 4 5 6
BLE OE A0 A1 A2 NC A
I/O8 BHE A3 A4 CE I/O0 B
I/O9 I/O10 A5 A6 I/O1 I/O2 C
VSS I/O11 A17 A7 I/O3 VCC D
VCC I/O12 DNU A16 I/O4 VSS E
I/O14 I/O13 A14 A15 I/O5 I/O6 F
I/O15 NC A12 A13 WE I/O7 G
NC A8 A9 A10 A11 NC H

Product Portfolio

Product	V_{CC} Range			Speed	Power Dissipation (Industrial)					
					Operating, I_{CC}				Standby (I_{SB2})	
					f = 1 MHz		f = f_{max}			
	$V_{CC(min.)}$	$V_{CC(typ.)}$[3]	$V_{CC(max.)}$		Typ.[3]	Max.	Typ.[3]	Max.	Typ.[3]	Max.
CY62146CV30	2.7V	3.0V	3.3V	55 ns	1.5 mA	3 mA	12 mA	25 mA	7 µA	15 µA
				70 ns	1.5 mA	3 mA	7 mA	15 mA		

Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature .....–65°C to +150°C

Ambient Temperature with Power Applied.....–55°C to +125°C

Supply Voltage to Ground Potential...–0.5V to V_{ccmax} + 0.5V

DC Voltage Applied to Outputs in High-Z State[4].....–0.5V to V_{CC} + 0.5V

DC Input Voltage[4]..... –0.5V to V_{CC} + 0.5V

Output Current into Outputs (LOW)..... 20 mA

Static Discharge Voltage ..... > 2001V (per MIL-STD-883, Method 3015)

Latch-Up Current ..... > 200 mA

Operating Range

Device	Range	Ambient Temperature	V_{CC}
CY62146CV30	Industrial	–40°C to +85°C	2.7V to 3.3V

Notes:

1. NC pins are not connected to the die.
2. E3 (DNU) can be left as NC or V_{SS} to ensure proper application.
3. Typical values are included for reference only and are not guaranteed or tested. Typical values are measured at V_{CC} = $V_{CC(typ.)}$, T_A = 25°C.
4. $V_{IL(min.)}$ = –2.0V for pulse durations less than 20 ns.

Electrical Characteristics Over the Operating Range

Parameter	Description	Test Conditions		-55			-70			Unit
				Min.	Typ.[3]	Max.	Min.	Typ.[3]	Max.	
V_{OH}	Output HIGH Voltage	I_{OH} = –1.0 mA	V_{CC} = 2.7V	2.4			2.4			V
V_{OL}	Output LOW Voltage	I_{OL} = 2.1mA	V_{CC} = 2.7V			0.4			0.4	V
V_{IH}	Input HIGH Voltage			2.2		V_{CC} + 0.3V	1.8		V_{CC} + 0.3V	V
V_{IL}	Input LOW Voltage			–0.3		0.8	–0.3		0.8	V
I_{IX}	Input Leakage Current	GND ≤ V_I ≤ V_{CC}		–1		+1	–1		+1	µA
I_{OZ}	Output Leakage Current	GND ≤ V_O ≤ V_{CC}, Output Disabled		–1		+1	–1		+1	µA
I_{CC}	V_{CC} Operating Supply Current	f = f_{MAX} = 1/t_{RC}	V_{CC} = 3.3V, I_{OUT} = 0 mA, CMOS Levels		12	25		7	15	mA
		f = 1 MHz			1.5	3		1.5	3	
I_{SB1}	Automatic CE Power-Down Current—CMOS Inputs	$\overline{CE}$ ≥ V_{CC} – 0.2V, V_{IN} ≥ V_{CC} – 0.2V or V_{IN} ≤ 0.2V, f = f_{max} (Address and Data Only), f=0 (OE,WE,BHE and BLE)			7	15		7	15	µA
I_{SB2}	Automatic CE Power-Down Current—CMOS Inputs	$\overline{CE}$ ≥ V_{CC} – 0.2V, V_{IN} ≥ V_{CC} – 0.2V or V_{IN} ≤ 0.2V, f = 0, Vcc=3.3V								

Capacitance[5]

Parameter	Description	Test Conditions	Max.	Unit
C_{IN}	Input Capacitance	T_A = 25°C, f = 1 MHz, V_{CC} = $V_{CC(typ.)}$	6	pF
C_{OUT}	Output Capacitance		8	pF

Thermal Resistance

Description	Test Conditions	Symbol	BGA	Units
Thermal Resistance (Junction to Ambient)[5]	Still Air, soldered on a 4.25 × 1.125 inch, four-layer printed circuit board	Θ_{JA}	55	°C/W
Thermal Resistance (Junction to Case)[5]		Θ_{JC}	16	°C/W

Note:
5. Tested initially and after any design or process changes that may affect these parameters.

AC Test Loads and Waveforms

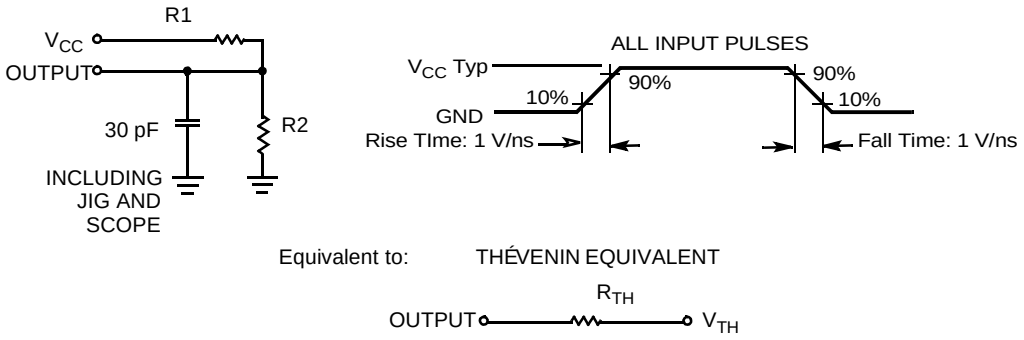

Parameters	3.0V	Unit
R1	1.105	KOhms
R2	1.550	KOhms
R_{TH}	0.645	KOhms
V_{TH}	1.75V	Volts

Data Retention Characteristics (Over the Operating Range)

Parameter	Description	Conditions	Min.	Typ.[3]	Max.	Unit
V_{DR}	V_{CC} for Data Retention		1.5		V_{ccmax}	V
I_{CCDR}	Data Retention Current	$\underline{V_{CC}}$= 1.5V $\overline{CE} \geq V_{CC} - 0.2V$, $V_{IN} \geq V_{CC} - 0.2V$ or $V_{IN} \leq 0.2V$		3	10	µA
t_{CDR}[5]	Chip Deselect to Data Retention Time		0			ns
t_R[6]	Operation Recovery Time		t_{RC}			ns

Note:
6. Full device AC operation requires linear V_{CC} ramp from V_{DR} to $V_{CC(min.)}$ > 100µs or stable at $V_{CC(min.)}$ >100 µs.

Data Retention Waveform

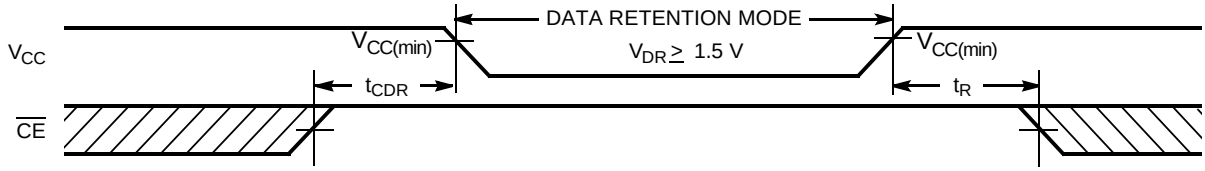

Switching Characteristics Over the Operating Range[7]

Parameter	Description	-55		-70		Unit
		Min	Max	Min	Max	
READ CYCLE						
t_{RC}	Read Cycle Time	55		70		ns
t_{AA}	Address to Data Valid		55		70	ns
t_{OHA}	Data Hold from Address Change	10		10		ns
t_{ACE}	$\overline{CE}$ LOW to Data Valid		55		70	ns
t_{DOE}	$\overline{OE}$ LOW to Data Valid		25		35	ns
t_{LZOE}	$\overline{OE}$ LOW to Low Z[8]	5		5		ns
t_{HZOE}	$\overline{OE}$ HIGH to High Z[8,10]		20		25	ns
t_{LZCE}	$\overline{CE}$ LOW to Low Z[8]	10		10		ns
t_{HZCE}	$\overline{CE}$ HIGH to High Z[8, 10]		20		25	ns
t_{PU}	$\overline{CE}$ LOW to Power-Up	0		0		ns
t_{PD}	$\overline{CE}$ HIGH to Power-Down		55		70	ns
t_{DBE}	$\overline{BHE}$ / $\overline{BLE}$ LOW to Data Valid		25		35	ns
t_{LZBE}[9]	$\overline{BHE}$ / $\overline{BLE}$ LOW to Low Z	5		5		ns
t_{HZBE}	$\overline{BHE}$ / $\overline{BLE}$ HIGH to High Z		20		25	ns
WRITE CYCLE[11]						
t_{WC}	Write Cycle Time	55		70		ns
t_{SCE}	$\overline{CE}$ LOW to Write End	45		60		ns
t_{AW}	Address Set-Up to Write End	45		60		ns
t_{HA}	Address Hold from Write End	0		0		ns
t_{SA}	Address Set-Up to Write Start	0		0		ns
t_{PWE}	$\overline{WE}$ Pulse Width	45		50		ns
t_{BW}	$\overline{BHE}$ / $\overline{BLE}$ Pulse Width	50		60		ns
t_{SD}	Data Set-Up to Write End	25		30		ns
t_{HD}	Data Hold from Write End	0		0		ns
t_{HZWE}	$\overline{WE}$ LOW to High Z[8, 10]		20		25	ns
t_{LZWE}	$\overline{WE}$ HIGH to Low Z[8]	5		5		ns

Notes:

7. Test conditions assume signal transition time of 5 ns or less, timing reference levels of $V_{CC(typ.)}/2$, input pulse levels of 0 to $V_{CC(typ.)}$, and output loading of the specified I_{OL}/I_{OH} and 30 pF load capacitance.
8. At any given temperature and voltage condition, t_{HZCE} is less than t_{LZCE}, t_{HZBE} is less than t_{LZBE}, t_{HZOE} is less than t_{LZOE}, and t_{HZWE} is less than t_{LZWE} for any given device.
9. If both byte enables are toggled together, this value is 10 ns.
10. t_{HZOE}, t_{HZCE}, t_{HZBE}, and t_{HZWE} transitions are measured when the outputs enter a high-impedance state.
11. The internal Write time of the memory is defined by the overlap of $\overline{WE}$, $\overline{CE}$ = V_{IL}, $\overline{BHE}$ and/or $\overline{BLE}$ = V_{IL}. All signals must be ACTIVE to initiate a Write and any of these signals can terminate a Write by going INACTIVE. The data input set-up and hold timing should be referenced to the edge of the signal that terminates the Write.

Switching Waveforms

Read Cycle 1 (Address Transition Controlled) [12, 13]

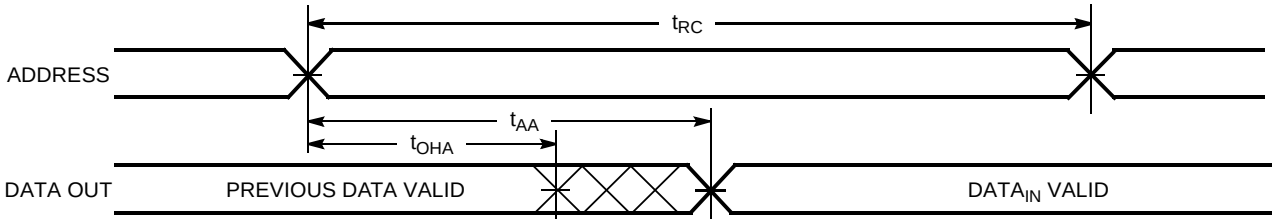

Read Cycle 2 ($\overline{OE}$ Controlled) [13, 14]

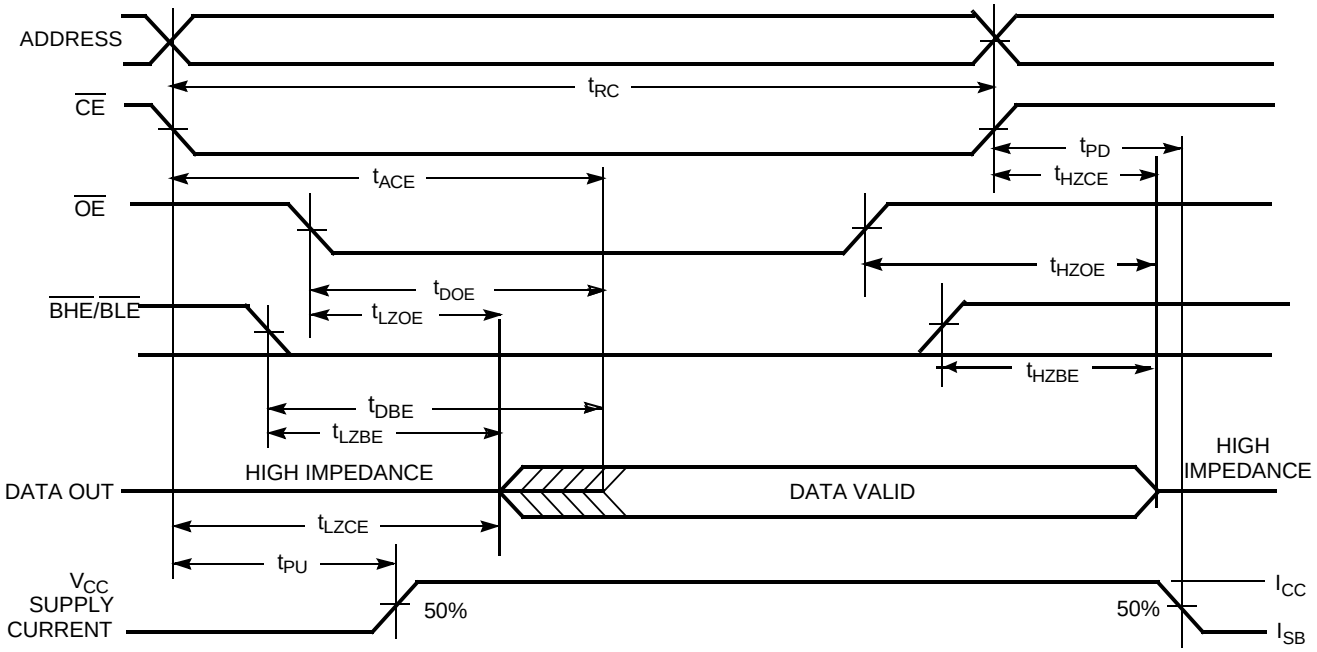

Notes:
12. Device is continuously selected. $\overline{OE}$, $\overline{CE}$ = V_{IL}, $\overline{BHE}$, $\overline{BLE}$ = V_{IL}.
13. $\overline{WE}$ is HIGH for Read cycle.
14. Address valid prior to or coincident with $\overline{CE}$, $\overline{BHE}$, $\overline{BLE}$ transition LOW.

Switching Waveforms (continued)

Write Cycle 1 ($\overline{WE}$ Controlled) [11, 15, 16]

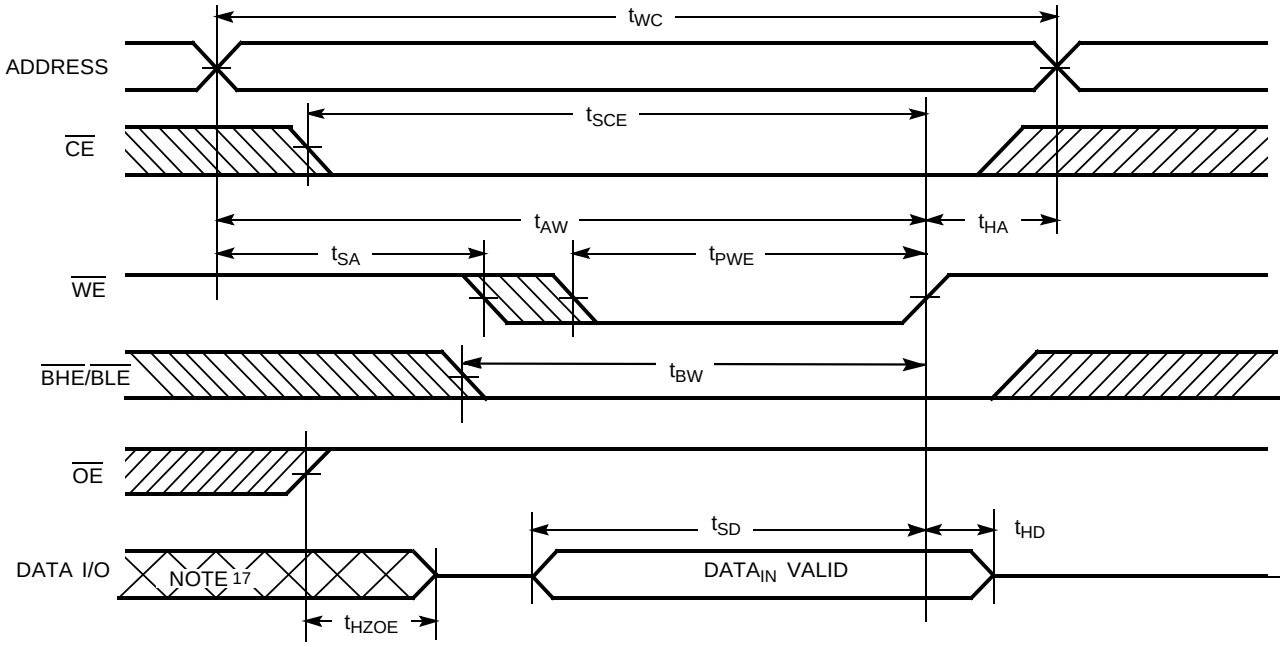

Write Cycle 2 ($\overline{CE}$ Controlled) [11, 15, 16]

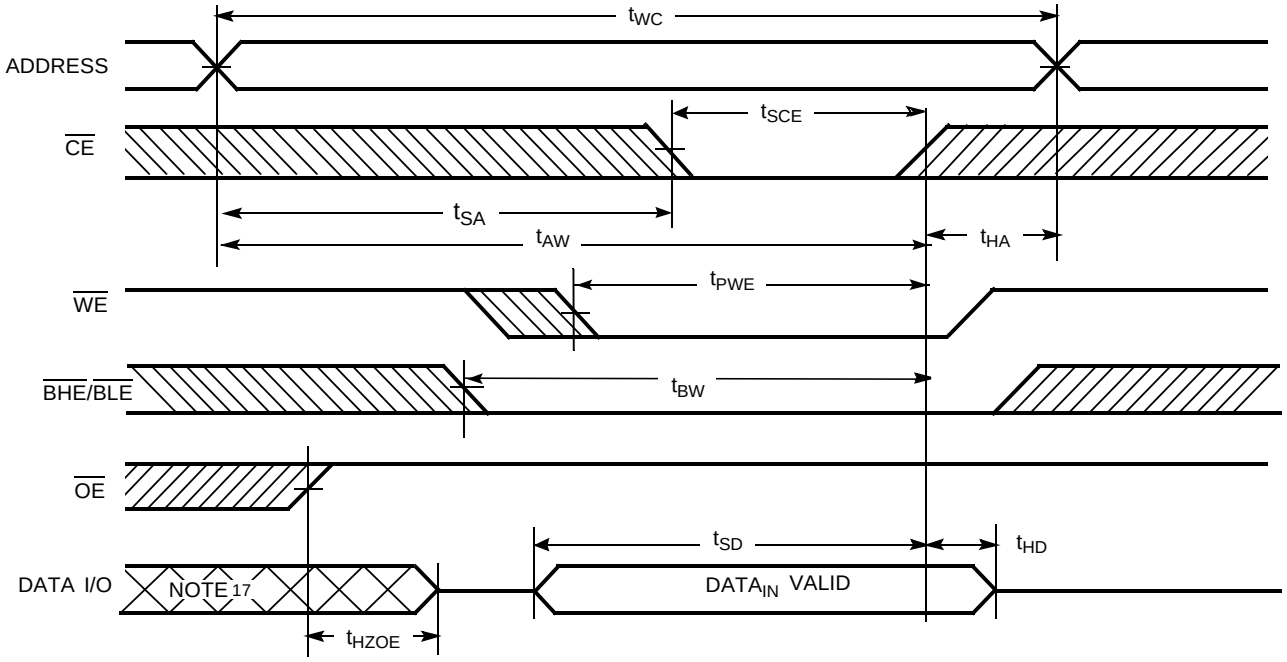

Notes:

15. Data I/O is high-impedance if $\overline{OE}$ = V_{IH}.
16. If $\overline{CE}$ goes HIGH simultaneously with $\overline{WE}$ HIGH, the output remains in a high-impedance state.
17. During this period, the I/Os are in output state and input signals should not be applied.

Switching Waveforms (continued)

Write Cycle 3 ($\overline{WE}$ Controlled, $\overline{OE}$ LOW)[16]

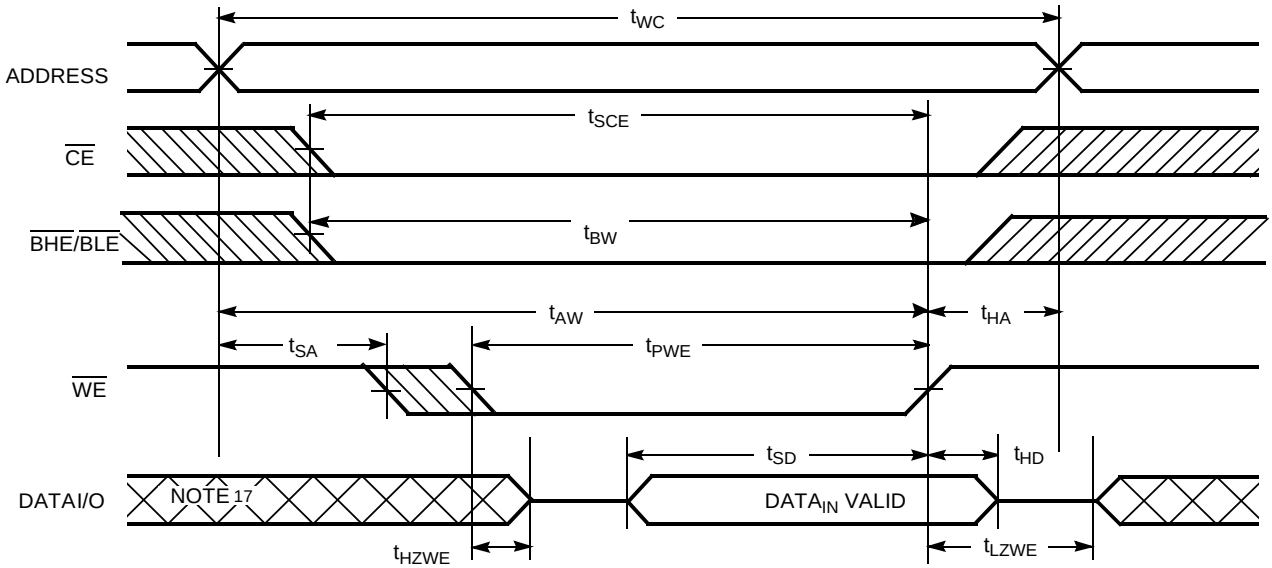

Write Cycle 4 ($\overline{BHE}$/$\overline{BLE}$ Controlled, $\overline{OE}$ LOW)[16]

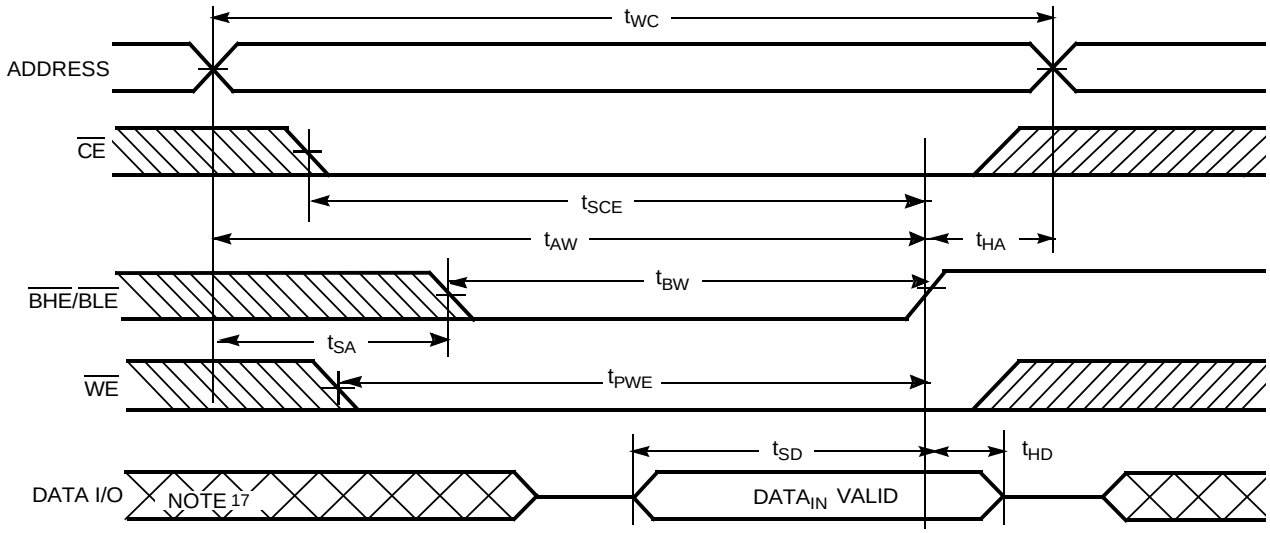

Typical DC and AC Parameters

(Typical values are included for reference only and are not guaranteed or tested.
Typical values are measured at $V_{CC} = V_{CC(typ.)}$, $T_A = 25°C$.)

Operating Current vs. Supply Voltage

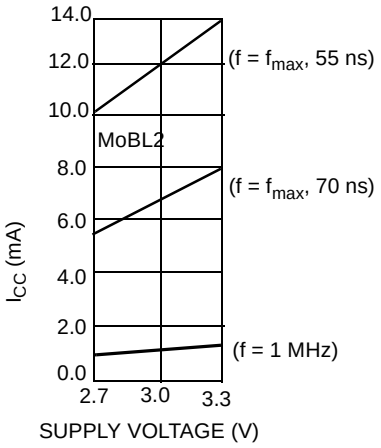

Standby Current vs. Supply Voltage

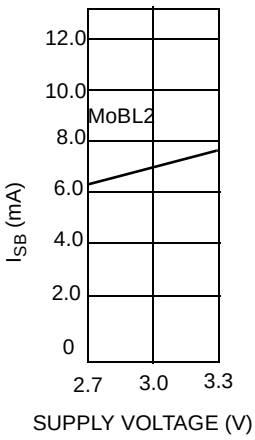

Access Time vs. Supply Voltage

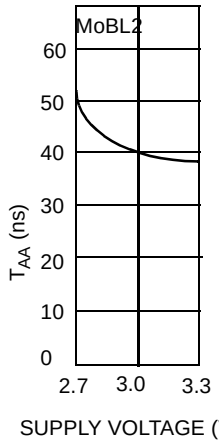

Truth Table

$\overline{CE}$	$\overline{WE}$	$\overline{OE}$	$\overline{BHE}$	$\overline{BLE}$	Inputs/Outputs	Mode	Power
H	X	X	X	X	High Z	Deselect/Power-Down	Standby (I_{SB})
L	X	X	H	H	High Z	Output Disabled	Active (I_{CC})
L	H	L	L	L	Data Out (I/O_O – I/O_{15})	Read	Active (I_{CC})
L	H	L	H	L	Data Out (I/O_O – I/O_7); I/O_8 – I/O_{15} in High Z	Read	Active (I_{CC})
L	H	L	L	H	Data Out (I/O_8 – I/O_{15}); I/O_0 – I/O_7 in High Z	Read	Active (I_{CC})
L	H	H	L	L	High Z	Output Disabled	Active (I_{CC})
L	H	H	H	L	High Z	Output Disabled	Active (I_{CC})
L	H	H	L	H	High Z	Output Disabled	Active (I_{CC})
L	L	X	L	L	Data In (I/O_O – I/O_{15})	Write	Active (I_{CC})
L	L	X	H	L	Data In (I/O_O – I/O_7); I/O_8 – I/O_{15} in High Z	Write	Active (I_{CC})
L	L	X	L	H	Data In (I/O_8 – I/O_{15}); I/O_0 – I/O_7 in High Z	Write	Active (I_{CC})

Ordering Information

Speed (ns)	Ordering Code	Package Name	Package Type	Operating Range
70	CY62146CV30LL-70BAI	BA48B	48-ball Fine Pitch BGA (7 mm × 8.5 mm × 1.2 mm)	Industrial
	CY62146CV30LL-70BVI	BV48A	48-ball Fine Pitch BGA (6 mm × 8 mm × 1 mm)	
55	CY62146CV30LL-55BAI	BA48B	48-ball Fine Pitch BGA (7 mm × 8.5 mm × 1.2 mm)	
	CY62146CV30LL-55BVI	BV48A	48-ball Fine Pitch BGA (6 mm × 8 mm × 1 mm)	

Package Diagrams

48-Ball (7.00 mm x 8.5 mm x 1.2 mm) Thin BGA BA48B

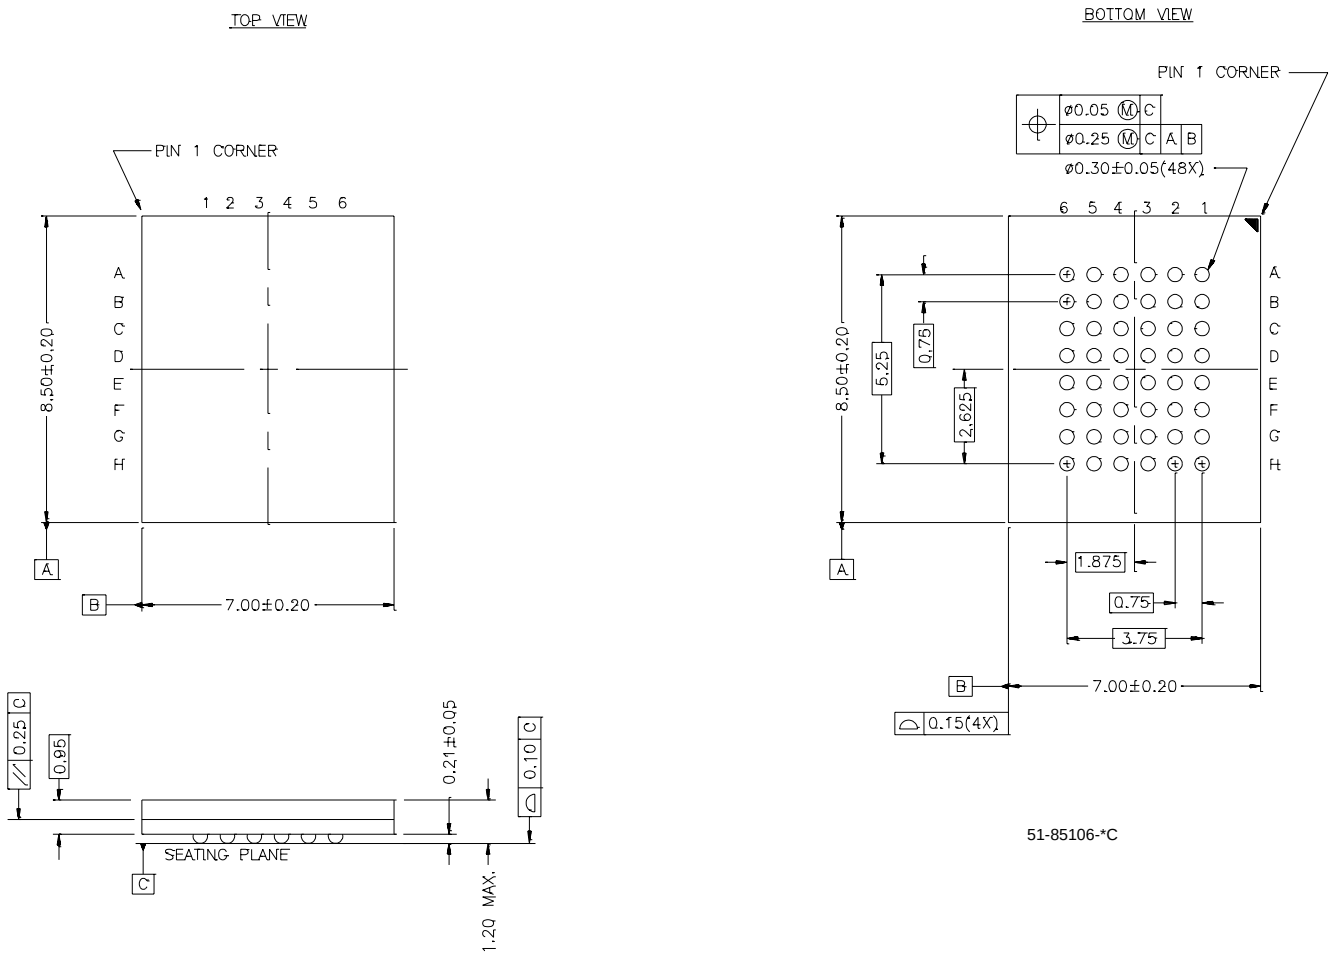

Package Diagrams (continued)

48-ball (6.0 mm × 8.0 mm × 1.0 mm) Fine Pitch BGA BV48A

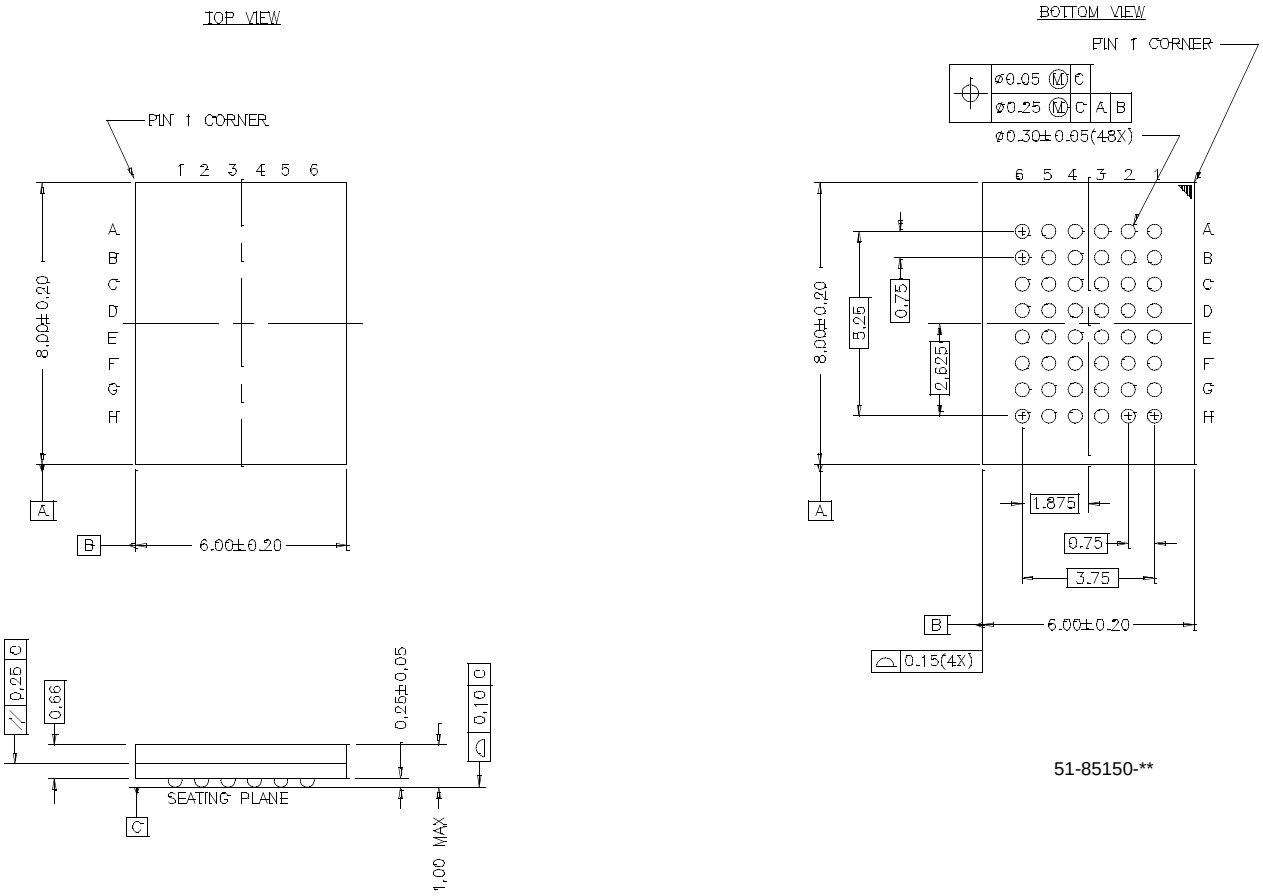

MoBL, MoBL2 and More Battery Life are trademarks of Cypress Semiconductor Corporation. All products and company names mentioned in this document are the trademarks of their respective holders.

© Cypress Semiconductor Corporation, 2001. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress Semiconductor product. Nor does it convey or imply any license under patent or other rights. Cypress Semiconductor does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress Semiconductor products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress Semiconductor against all charges.

Document Title: CY62146CV30 MoBL™ 256K x 16 STATIC RAM Document Number: 38-05203				
REV.	**ECN NO.**	**Issue Date**	**Orig. of Change**	**Description of Change**
**	112395	01/18/02	GAV	New Data Sheet